



**SELF-PROPELLED
SCISSORS**

CUSTOMERS FIRST. ALWAYS.

PARTNERING FOR SUCCESS

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships founded on the idea of partnership. Because you, our customer, are at the centre of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

PROVIDING SUPERIOR VALUE

Our commitment doesn't end with the sale. Our dedicated service teams provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



Genie
A TEREX BRAND

SETTING THE STANDARD

Genie manufactures some of the most advanced, highest-valued lift equipment in the industry. Genie distinctive blue lifts set the standard for performance and durability — not to mention support from people who understand your business.



ELEVATED EFFICIENCY WITH INDUSTRY-LEADING DESIGN

The ever-expanding line of Genie® electric and rough terrain scissor lifts offers you unmatched performance and versatility — boosting work site productivity. Genie® electric scissor lifts are exceptionally mobile, letting you manoeuvre in tight worksites. Plus, they're productive and efficient, allowing maximum workspace for larger loads and more workers. Genie® rough terrain scissor lifts also enhance productivity by providing exceptional traction, speed and gradeability. They're the perfect machines for big outdoor jobs where platform work space is critical.

Genie® scissor lifts provide productivity-enhancing speed and gradeability to help you make the most of the equipment on your jobsite.



MAXIMIZE YOUR **PRODUCTIVITY**

Genie® self-propelled electric scissor lifts are the industry solution for increasing worksite productivity. Ideal for manoeuvring in tight spaces, they're excellent for indoor and outdoor construction, maintenance and installation applications with firm, level surfaces. Characterized by low noise levels, these lifts provide excellent capacity and maximum platform workspace.

EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Swing-out battery box and power module trays allow easy access to engine components for convenient service.



SIMPLE ACCESS

These compact units easily pass through standard single or double doors. Solid non-marking tyres are standard (except GSTM-2668 DC & GSTM-3268 DC models).



The Genie® slab scissors family has been completely updated with features that enhance reliability, serviceability and performance.

SELF-PROPELLED SCISSORS | ELECTRIC



CONVENIENT OPERATION

Low-emission electric scissors deliver a quiet, convenient method for operation in sound-sensitive environments like office buildings, shopping malls, hotels, schools and more. Gain access to even loftier jobs with the GS™-3232, which provides working heights up to 11.75 m (38 ft) while fitting into spaces as narrow as 81 cm (32 in) wide.



OUTDOOR FUNCTIONALITY

Electric self-propelled scissors offer outdoor functionality on firm, level surfaces, providing accessibility for a wide variety of applications.

COMPACT MANOEUVRABILITY

All models have front-wheel drive and most models feature zero inside turning radius for excellent manoeuvrability in tight spaces like congested construction sites, lifts and narrow aisles.

ELECTRIC MODELS AVAILABLE

GS™-1532	GS™-1932	GS™-2032	GS™-2632	GS™-3232
GS™-2046	GS™-2646	GS™-3246	GS™-2668 DC	GS™-3268 DC

OPTIONS

FOR ELECTRIC SELF-PROPELLED SCISSORS

GS™-1532

GS™-1932

GS™-2032

GS™-2632

GS™-3232

GS™-2046

GS™-2646

GS™-3246

GS™-2668 DC

GS™-3268 DC

PLATFORM										
PLATFORM SWING GATE HALF HEIGHT	O	O	O		O					
FOLDING GUARDRAILS WITH PLATFORM HALF HEIGHT SWING GATE	S	S	S	S	S					
FOLDING GUARDRAILS WITH PLATFORM FULL HEIGHT SWING GATE						S	S	S	S	S
AIR LINE TO PLATFORM	O	O	O	O	O	O	O	O	O	O
WARNING										
DUAL FLASHING BEACONS	O	O	O	O	O	O	O	O	O	O
MOTION ALARM	O	O	O	O	O	O	O	O	O	O
AUTOMOTIVE-STYLE HORN	O	O	O	O	O	O	O	O	S	S
ELECTRONIC HORN	S	S	S	S	S	S	S	S		
STABILITY										
AUTOMATIC LEVELING HYDRAULIC OUTRIGGERS					S					
POWER										
POWER INVERTER (110 V/60 HZ/800 W)	O	O	O	O	O	O	O	O	O	O
POWER INVERTER (230 V/50 HZ/800 W)	O	O	O	O	O	O	O	O	O	O
TYRES										
SOLID NON-MARKING TYRES	S	S	S	S	S	S	S	S	O	O

O = OPTION S = STANDARD



FOLDING GUARDRAILS

Neatly folding guardrails make it easy to manoeuvre through doorways, into lifts and throughout other height-restricted areas.

SELF-PROPELLED SCISSORS | ELECTRIC MODEL OPTIONS



DUAL FLASHING BEACONS

Orange flashing lights warn workers when lift is moving or in operation.

NON-MARKING TYRES
These hard rubber non-marking tyres prevent scuffing floors or picking up debris that could otherwise damage a floor.



SELF-LEVELLING OUTRIGGERS

The Genie GS™-3232 slab scissors model helps maximize uptime with a compact, manoeuvrable design and automatic hydraulic, non marking, self-levelling outriggers that level the lift on uneven ground — up to 5° side to side — before elevating the platform.

BOOST YOUR PERFORMANCE AND POWER

Genie® rough terrain scissor lifts are tough, construction-oriented four-wheel drive machines with positive traction control — ideal for increasing productivity in demanding outdoor worksites. Competitive lift speed and large platforms maximize efficiency with the handling and capacity to get to the jobsite and finish working faster.



SPEED AND TRACTION


Genie® RT scissor lifts are able to traverse through uneven or rough terrain environments more efficiently. They are equipped with four-wheel drive and positive traction control for traction when you need it most. They offer up to 50% gradeability when driving on slopes.



FOLD-DOWN CONVENIENCE

Heavy duty fold-down guardrails and a removable rear platform railing allow increased accessibility for loading and unloading the machine in trucks, containers and other situations with limited overhead space.

Genie® RT models are built for the rental industry and built to last. They're designed to stand up to the rigours of frequent use in diverse worksite conditions.

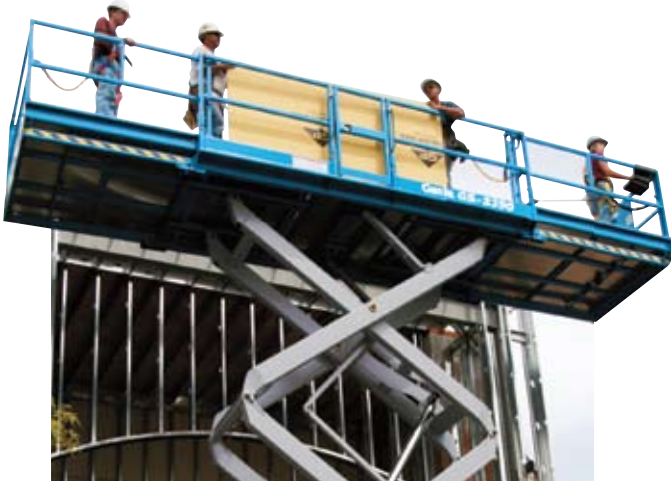

MORE ROOM TO WORK

These units are ideal for jobs that require greater capacity for more workers, materials and tools. For added workspace, all RT models come standard with a multi-position slide-out extension deck on the front of the platform. A rear slide-out extension deck can be added to models GS™-3384 and up. The superdeck also available as an option, has longer front and rear extension decks to give an extended platform of 7.3 m. In addition, power to the platform allows workers to use electrically powered tools.



EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Plus, slide- or pull-out engine trays allow easy access to components — no need to reach around obstacles inside the machine. Many parts and service procedures are common across the entire Genie® scissors line for cost-effective parts stocking and maintenance efficiencies.



ROUGH TERRAIN MODELS AVAILABLE

GS™-2668 RT

GS™-3268 RT

GS™-3384 RT

GS™-3390 RT

GS™-4390 RT

GS™-5390 RT

OPTIONS

FOR ROUGH TERRAIN SELF-PROPELLED SCISSORS

GS™-2668 RT GS™-3268 RT GS™-3384 RT GS™-3390 RT GS™-4390 RT GS™-5390 RT

PLATFORM						
DUAL SLIDE-OUT EXTENSION DECK PACKAGE (FRONT & REAR)			○	○	○	○
AIR LINE TO PLATFORM	○	○	○	○	○	○
WARNING						
DUAL FLASHING BEACONS	○	○	○	○	○	○
MOTION ALARM	○	○	○	○	○	○
STABILITY						
AUTOMATIC LEVELLING HYDRAULIC OUTRIGGERS	○	○	○	○	○	S
OSCILLATING AXLE				S	○	○
POWER						
2,000 AC WATT GENERATOR (110 V/60 HZ)	○	○	○	○	○	○
ENGINE						
HYDRAULIC OIL COOLER	○	○	○	○	○	○
DIESEL SCRUBBER/ SPARK ARRESTOR	○	○	○	○	○	○
COLD START PACKAGES (BY ENGINE TYPE)	○	○	○	○	○	○
TANKS						
SPARE PROPANE TANK	○	○	○	○	○	○
TYRES						
NON-MARKING RT TYRE	○	○	○	○	○	○
HIGH FLOTATION FOAM-FILLED TYRES			○	○	○	○

○ = OPTION S = STANDARD



OSCILLATING AXLE

Genie's oscillating axle automatically senses the terrain and adjusts the axle position based on ground conditions for maximum stability.



SELF-LEVELLING HYDRAULIC OUTRIGGERS

Save time with Genie's automatic levelling hydraulic outriggers. All four outriggers automatically deploy simultaneously to ensure the lift is level on uneven ground before elevating the platform.

SPECIFICATIONS


SELF-PROPELLED SCISSORS

MODEL	WORKING HEIGHT		WIDTH		TURNING RADIUS*		LIFT CAPACITY		GRADEABILITY**	WEIGHT***	
	Metric	US	Metric	US	Metric	US	Metric	US		Metric	US
ELECTRIC SCISSOR LIFTS											
GS™-1532	6.60 m	21 ft	81 cm	2 ft 8 in	1.55 m	5 ft 1 in	272 kg	600 lbs	30%	1,269 kg	2,797 lbs
GS™-1932	7.80 m	25 ft	81 cm	2 ft 8 in	1.55 m	5 ft 1 in	227 kg	500 lbs	25%	1,503 kg	3,313 lbs
GS™-2032	8.10 m	26 ft	81 cm	2 ft 8 in	2.13 m	7 ft	363 kg	800 lbs	30%	1,830 kg	4,034 lbs
GS™-2632	9.92 m	32 ft	81 cm	2 ft 8 in	2.13 m	7 ft	227 kg	500 lbs	25%	1,959 kg	4,318 lbs
GS™-3232	11.75 m	38 ft	81 cm	2 ft 8 in	2.13 m	7 ft	227 kg	500 lbs	25%	2,352 kg	5,185 lbs
GS™-2046	8.10 m	26 ft	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	544 kg	1,200 lbs	30%	1,945 kg	4,288 lbs
GS™-2646	9.92 m	32 ft	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	454 kg	1,000 lbs	30%	2,412 kg	5,317 lbs
GS™-3246	11.75 m	38 ft	1.17 m	3 ft 10 in	2.29 m	7 ft 6 in	318 kg	700 lbs	25%	2,781 kg	6,131 lbs
GS™-2668 DC	9.92 m	32 ft	1.73 m	5 ft 8 in	3.68 m	12 ft 1 in	567 kg	1,250 lbs	30%	3,106 kg	6,847 lbs
GS™-3268 DC	11.75 m	38 ft	1.73 m	5 ft 8 in	3.68 m	12 ft 1 in	454 kg	1,000 lbs	25%	3,674 kg	8,098 lbs
ROUGH TERRAIN SCISSOR LIFTS											
GS™-2668 RT	9.92 m	32 ft	1.73 m	5 ft 8 in	3.68 m	12 ft 1 in	567 kg	1,250 lbs	35%	3,268 kg	7,204 lbs
GS™-3268 RT	11.75 m	38 ft	1.73 m	5 ft 8 in	3.68 m	12 ft 1 in	454 kg	1,000 lbs	30%	3,776 kg	8,324 lbs
GS™-3384 RT	12.10 m	39 ft	2.13 m	7 ft	5.94 m	19 ft 6 in	1,134 kg	2,500 lbs	50%	5,473 kg	12,066 lbs
GS™-3390 RT	12.10 m	39 ft	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	1,134 kg	2,500 lbs	50%	5,541 kg	12,216 lbs
GS™-4390 RT	15.11 m	49 ft	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	680 kg	1,500 lbs	50%	5,957 kg	13,133 lbs
GS™-5390 RT	18.15 m	59 ft	2.29 m	7 ft 6 in	5.33 m	17 ft 6 in	680 kg	1,500 lbs	40%	7,623 kg	16,806 lbs

*Outside.

**Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings. Gradeability may vary depending on options installed on machine.

***Weight will vary depending on options and/or country standards.

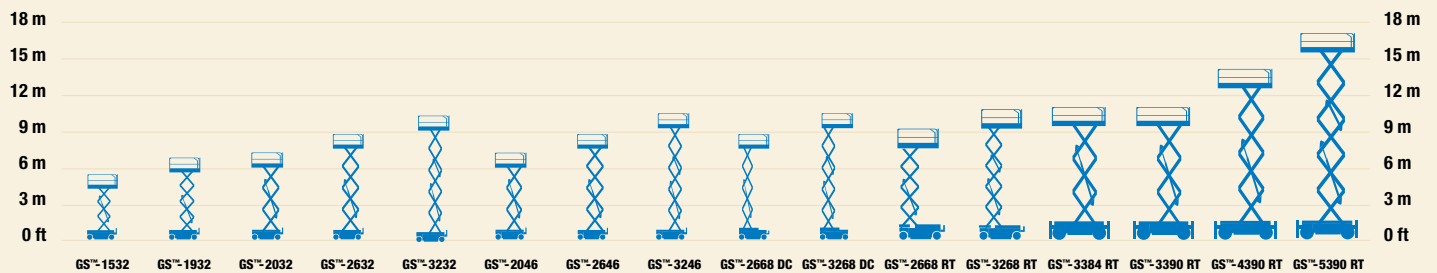



GENIE HAS YOU COVERED



United Kingdom

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tél. + 44 (0) 1476 584333
Fax + 44 (0) 1476 584334

Enquiries

Tel: +31 165 519 361
Fax: +31 165 511 148

United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
U.S.A. 98073-9730

Tel +1 (425) 881 1800
Fax +1 (425) 883 3475

Distributed by:

WEB www.genieindustries.com

Email AWP-InfoEurope@terex.com

Effective date: Nov, 2010. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries. All rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc in the U.S.A. and many other countries. Genie is a Terex Company. Copyright 2010 Terex Corporation

Part No.B109305UK. Effective date 11/10