

MCR 225 A - 50 Hz								hp	kW	
▲	75 LVF 35	m/min	0 → 40 → 46 → 81 → 96	0 → 20 → 23 → 41 → 48	75	55	766 m			
	Optima	t	7 6 3 2,25	14 12 6 4,5						
▼	100 LVF 35	m/min	0 → 52 → 62 → 108 → 140	0 → 26 → 31 → 54 → 70	100	75	1146 m			
	Optima	t	7 6 3 1,75	14 12 6 3,5						
●	150 LCC 35	m/min	0 → 84 → 100 → 124 → 166 → 200	0 → 42 → 50 → 62 → 83 → 100	150	110	1004 m			
		t	7 5,25 3,5 1,75 0,875	14 10,5 7 3,5 1,75						
▶	75 V VF 30	m/min	2 min				75	55		
●	RVF 162 Optima +	rpm	0 → 0,7				2 x 7,5	2 x 5,5		
CEI 38			IEC 38			kVA				
400 V (+6% -10%)			75 LVF : 165 kVA 100 LVF : 190 kVA 150 LCC : 240 kVA							

MCR 225 A - 60 Hz								hp	kW	
▲	75 LVF 35	m/min	0 → 40 → 46 → 81 → 96	0 → 20 → 23 → 41 → 48	75	55	766 m			
	Optima	t	7 6 3 2,25	14 12 6 4,5						
▼	100 LVF 35	m/min	0 → 52 → 62 → 108 → 140	0 → 26 → 31 → 54 → 70	100	75	1146 m			
	Optima	t	7 6 3 1,75	14 12 6 3,5						
●	150 LCC 35	m/min	0 → 84 → 100 → 124 → 166 → 200	0 → 42 → 50 → 62 → 83 → 100	150	110	1004 m			
		t	7 5,25 3,5 1,75 0,875	14 10,5 7 3,5 1,75						
▶	75 V VF 30	m/min	2 min				75	55		
●	RVF 162 Optima +	rpm	0 → 0,7				2 x 7,5	2 x 5,5		
CEI 38			IEC 38			kVA				
480 V (+6% -10%)			75 LVF : 165 kVA 100 LVF : 190 kVA 150 LCC : 270 kVA							

GB

- ▲ Hoisting
- ▼ Luffing
- Slewing



This commercial document is not legally binding.
For any technical information, please refer to the corresponding instructions.

Manitowoc
Crane CARE

Manitowoc
Crane Group



Americas
Tel : +1 888 479 7278
Tel : +1 717 593 2000

Europe - Middle East - Africa
Tel : +33 (0) 4 72 81 50 00
Tel : +44 (0) 191 522 2000

Asia - Pacific
Tel : +65 6264 1188
Fax : +65 6862 4040

www.manitowoccrane.com

Manitowoc Crane Group Asia Pte Ltd
Manitowoc Crane Group
4 Kwong Min Road
Singapore 628707
Tel: +65 6264 1188
Fax: +65 6862 4040
www.manitowoccrane.com


MCR 225 A
Réf. 2006 06 MDM 4

Copyright.Reproduction interdite © POTAIN 2006

Réalisation Sedoc

POTAIN

MCR 225 A

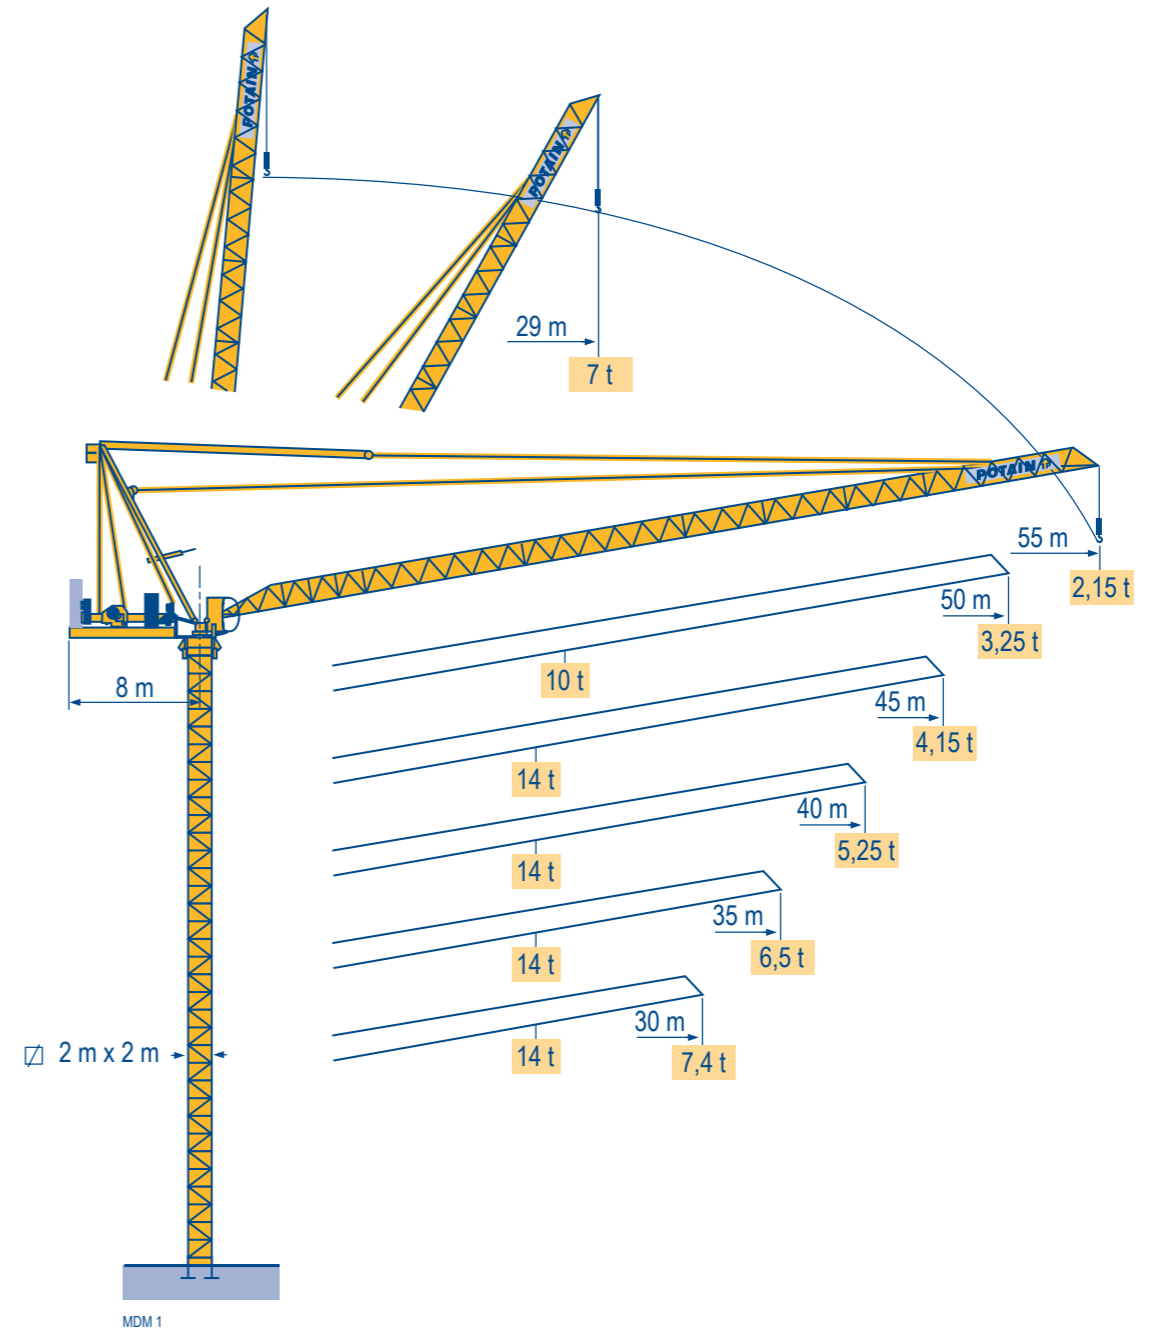


Manitowoc
Crane Group

TÜV FEM 1.001-A3
ISO 9001


Masts / Reactions

MDM 2

Telescopic 2 m

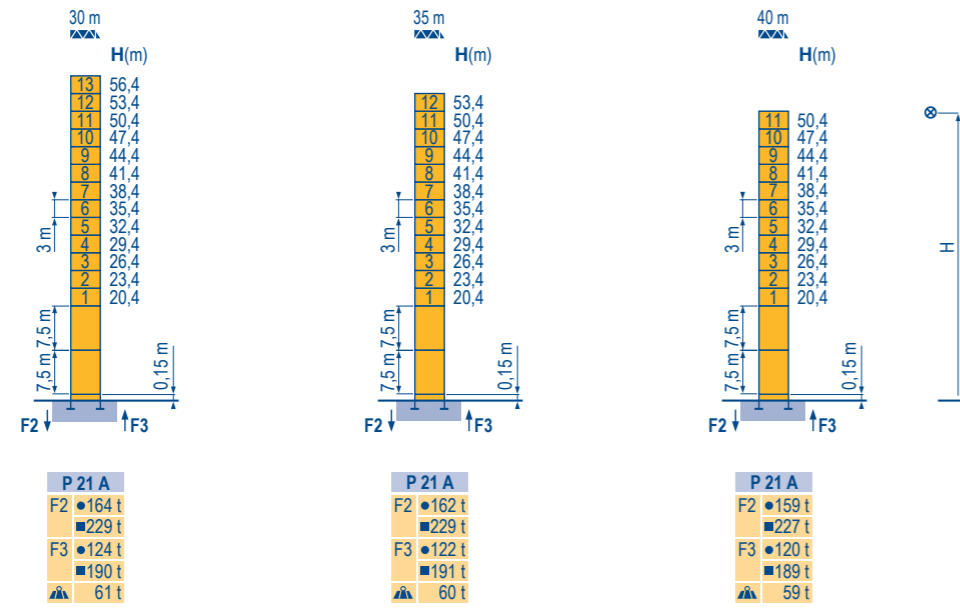

Telescopic 2 m

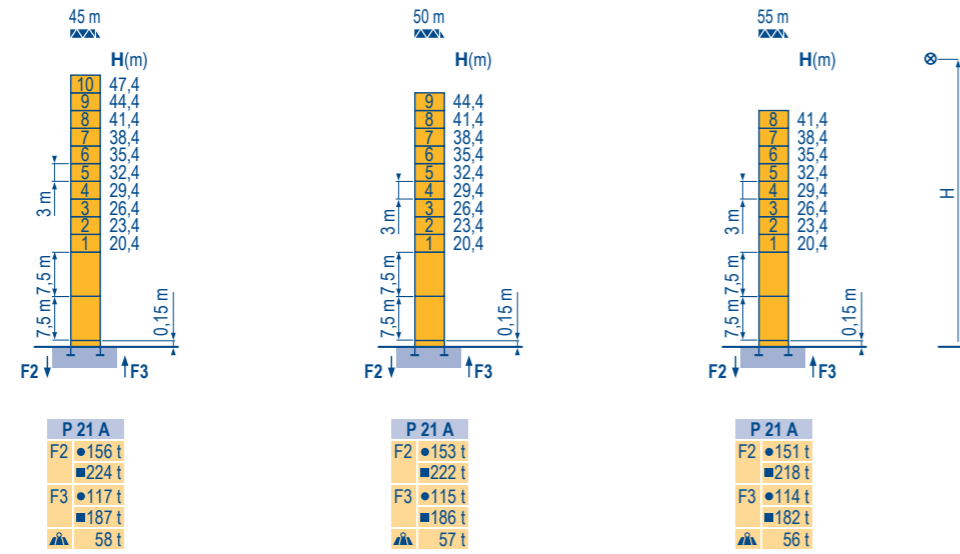

MCR 225 A




GB

- Reactions in service
- Reactions out of service
- ⊕ Without load, ballast (or transport axles), with maximum jib and maximum height.


Load diagrams

MDM 1

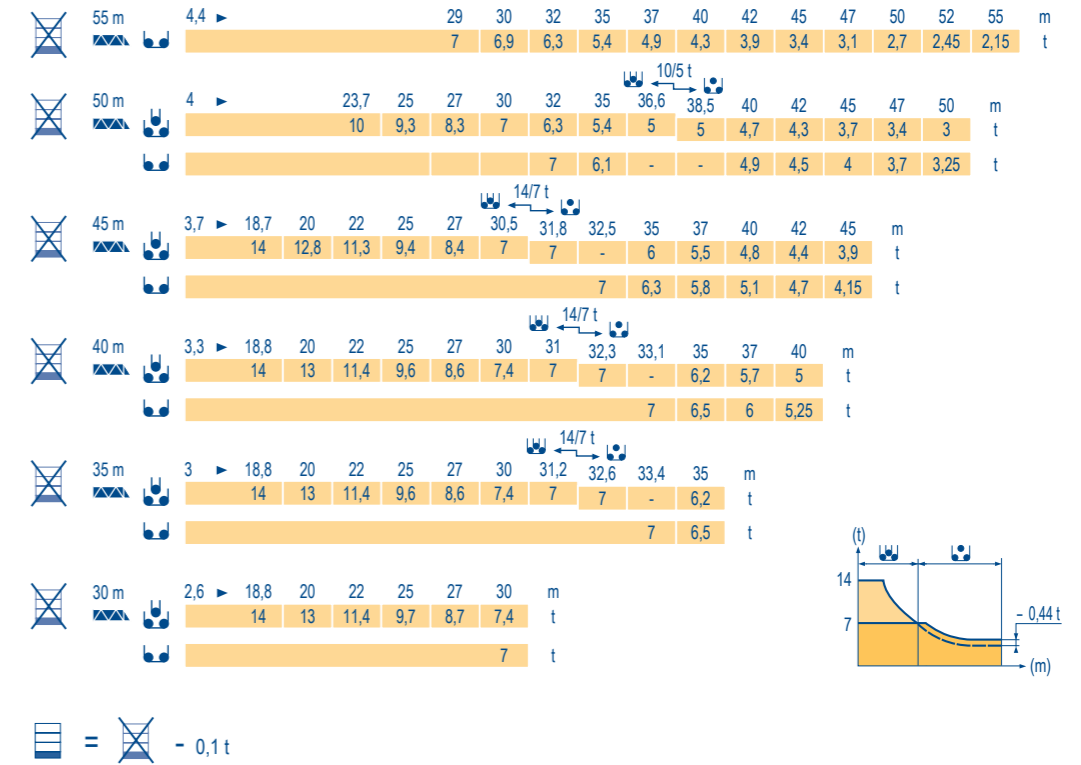

Luffing jib

MDM 1

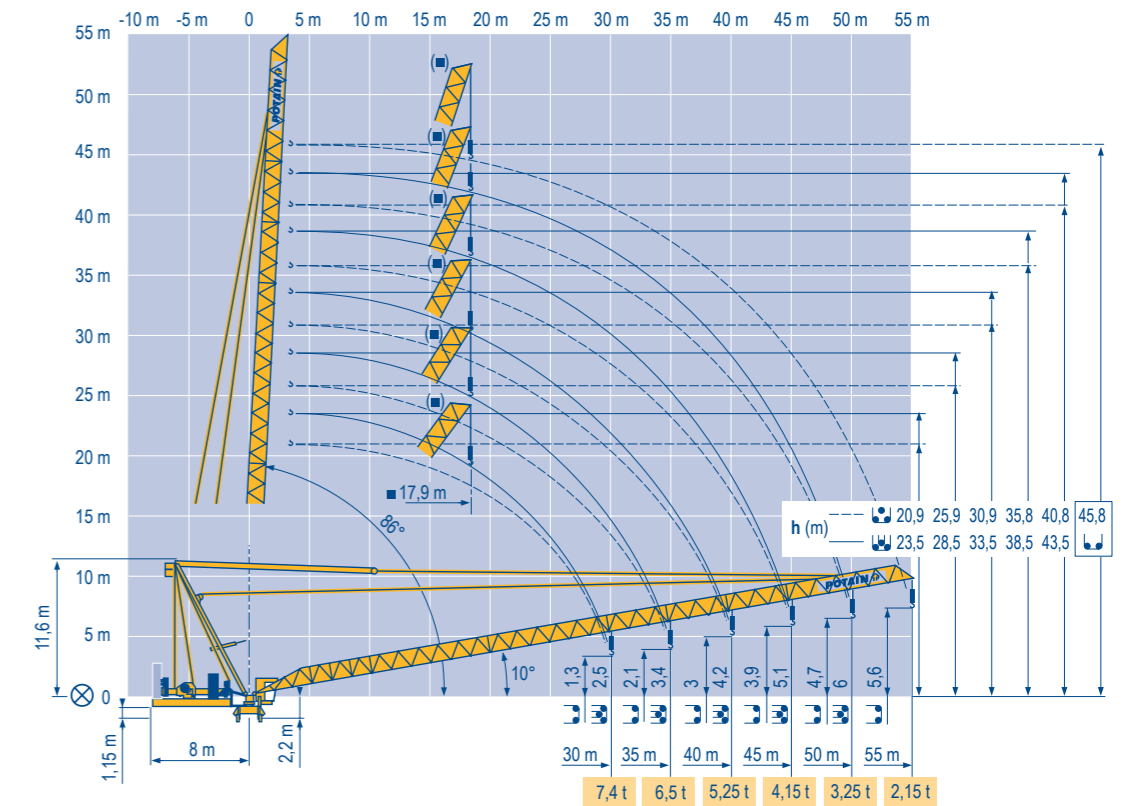

MCR 225 A



GB

- ⊗ Load diagrams without jib-end inspection platform
- ⊕ Load diagrams with jib-end inspection platform deduct 0,1 t
- ⊙ Jib hinge shaft
- ⊖ Weathervaning position