




## SLX 8-9



### Technical data

The complete range		SLX 8	SLX 9
<b>Drum</b>			
Nominal capacity	mc	8	9
Geometric volume	mc	14,0	15.9
Filling ratio	%	57	56.3
Water line	mc	9	10.2
Rotation speed	r.p.m.	14	14
Diameter	mm	2300	2300
Rollers	n°	2	2
Water pump output	l/min	400	400
Water pump pressure	bar	3,5	3.5
Water meter scale	l	0-500	0-500
Water tank capacity	l	400	400
<b>Driven by</b>			
P.T.O. <input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Required power	kW	63	72
<b>Dimension</b>			
A - min. length of frame	mm	5479	5970
B - min. length of mixer	mm	6660	7167
C - overhang	mm	1205	1205
G - center of gravity	mm	2160	2450
H - max. height *	mm	2650	2725
Max width	mm	2355	2355
Total weight (empty) **	Kg	3420	3540
<b>Truck Specification</b>			
Truck axles		4 Axles	4 Axles

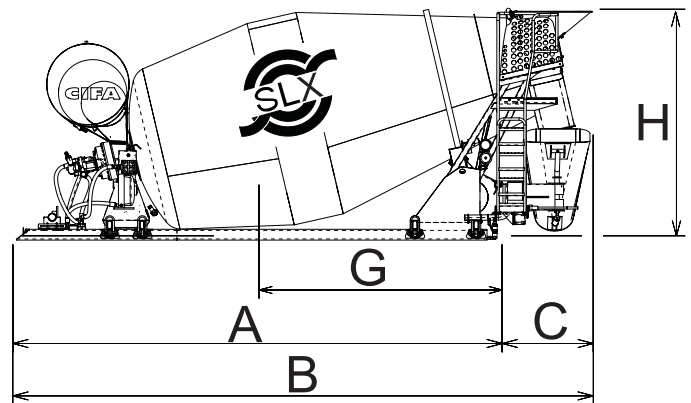

Technical data and characteristics subject to modifications without notice

\* CIFA standard frame

\*\* Weights may vary  $\pm 5\%$  according to DIN 70200

